

SIRUBA

銀箭牌

DL8000 SERIES FEATURES

DL8000- BM1L /BH1L /BX2L

单步进大空间电脑平缝车


**Large Space Computerized
Lockstitch Sewing Machine
With Single Stepping Motor**



DL8100P- BM1L /BH1L /BX2L

双步进大空间电脑平缝车

**Large Space Computerized
Lockstitch Sewing Machine
With Double Stepping Motor**

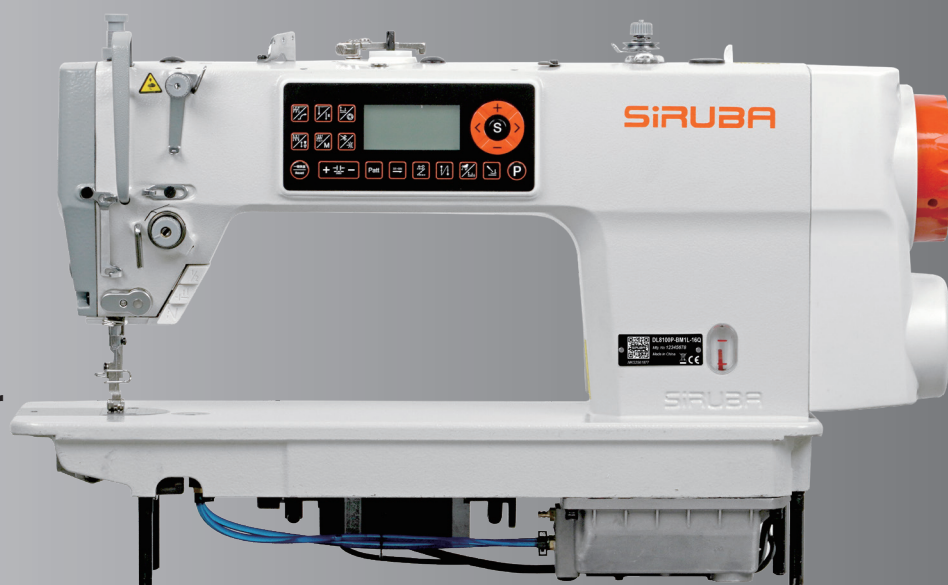


特点

FEATURES

完整而优良的各项细节 Complete and excellent details

三个按键：
配有三个功能键，方便进行倒缝加固、补针（补1针，补1/2针）操作。

Three buttons:
Equipped with three functional buttons, so that it is convenient for backstitch and stitch compensation (1 stitch, 1/2 stitch).




多功能键操作面板：
操作盒按键内容直接，操作简便迅速。

Multi-function key operation panel:
The operation box has direct key content, and the operation is simple and rapid.


缝制多达 9 种不同线迹
Swing up to 9 different stitch patterns



DL8100P 密封油盘
DL8100P Closed oil pan

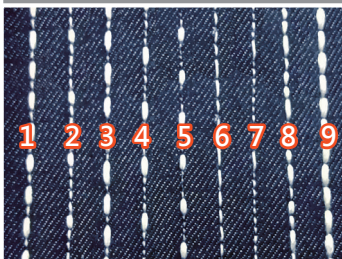

USB 充电埠
USB charging port

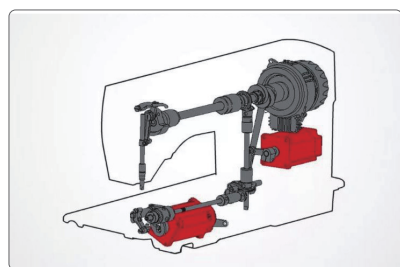

DL8100P 双步进马达驱动，实现完美的连贯动作

底部的步进马达控制双动刀切线与抬压脚，右侧的步进马达控制针距与倒缝，以电控技术串联每一个缝纫机功能，实现完美的连贯动作

DL8100P Double stepper motors drive for the perfect coherent movements

The bottom stepper motor controls the double knives thread trimmer and presser foot lifter, and the right side stepper motor controls the stitch distance and reverse stitch. The computer control technology integrates every function of the sewing machine, and realize the perfect coherent movements.

规格

SPECIFICATIONS

DL8000 DL8100P	mm — — —	mm !	mm !			Needle No.	S.P.M. (Max)	自动切线 Auto trimming	倒缝 Reverse Feeding	电子夹线 Thread Gripper	自动 抬压脚 Auto Lifter	可变量 Adjustable Thread Pick- Up Level
			手动 Hand	膝动 Knee	自动 Auto							
BM1L(A)-16Q	0~5 / A : 0~7	15.5	5.5	13	10	DB × 1 #11~#14	4500	V	V	V	V	—
BH1L(A)-16Q	0~5 / A : 0~7	18	5.5	13	10	DB × 1 #18~#21	4000	V	V	V	V	—
BX2L(A)-16Q	0~5 / A : 0~7	18	5.5	13	10	DB × 1 #20~#23	3500	V	V	V	V	—

DL8000P	mm — — —	mm !	mm !			Needle No.	S.P.M. (Max)	自动切线 Auto trimming	倒缝 Reverse Feeding	电子夹线 Thread Gripper	自动 抬压脚 Auto Lifter	防鸟巢 Bird nest Prevention
			手动 Hand	膝动 Knee	自动 Auto							
BM1(A)	0~5 / A : 0~7	15.5	5.5	13	9	DB × 1 #11~#14	4500	V	V	V	V	16Q — 17Q V
BH1(A)	0~5 / A : 0~7	18	5.5	13	9	DB × 1 #18~#21	4000	V	V	V	V	16Q — 17Q V
BX2L(A)	0~5 / A : 0~7	18	5.5	13	9	DB × 1 #20~#23	3500	V	V	V	V	16Q — 17Q V

* A : 表示针板、送具为三排齿 A : Needle plate, feed dog have three gears.
无 : 表示针板、送具为四排齿 None : Needle plate, feed dog have four gears.

高林股份有限公司
KAULIN MFG. CO., LTD.

由於对产品的改良及更新，本产品型录中之产品规格及外观的修改恕不事先通知！
The specification and/or appearances of the equipment described in this catalogue are subject to change without previous notice because of modification.

C.S2025-07. AUG. 2025